





BCMA Series

FEATURES

- Exclusive square type closed magnetic core designed as an
- Low profile design makes it optimal for surface mounting.
- Excellent impedance characteristics, making it great for
- Maximum 15A can be used in 125°C environments.
- Operating temperature range: -40 to +125°C
- AEC-Q200 qualified
- Quantity: 1500pcs










APPLICATIONS


- for various DC power lines, multimedia devices, and



	(Ω)	(Ω)	(A)	(mΩ)	(V)	(MΩ)
BCMA7060-700Y	40	70	15	5	80	10
BCMA7060-141Y	100	140	9.0	10	80	10
BCMA7060-301Y	225	300	5.0	10	80	10
BCMA7060-501Y	400	500	5.0	10	80	10
BCMA7060-701Y	500	700	4.0	15	80	10
BCMA7060-102Y	800	1000	3.0	17	80	10
BCMA7060-132Y	910	1300	3.0	20	80	10
BCMA7060-272Y	2000	2700	1.0	63	80	10
BCMA7060-302Y	2500	3000	0.9	75	80	10




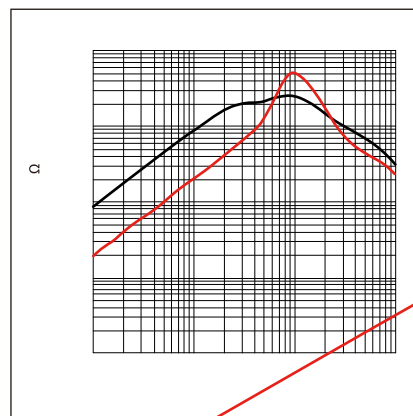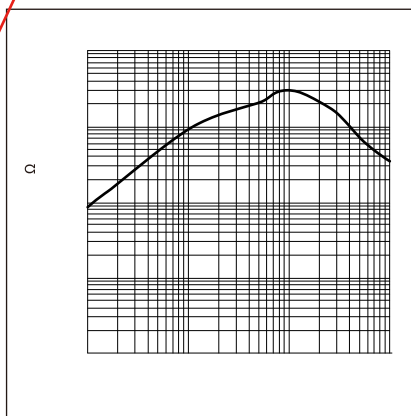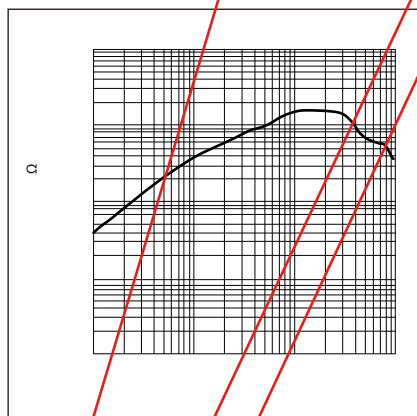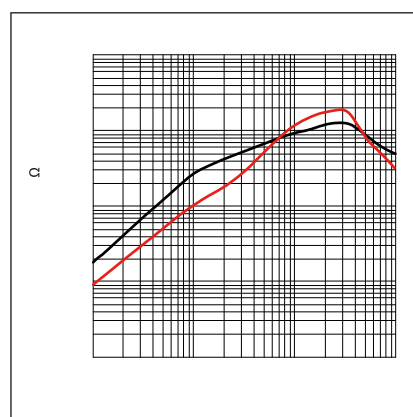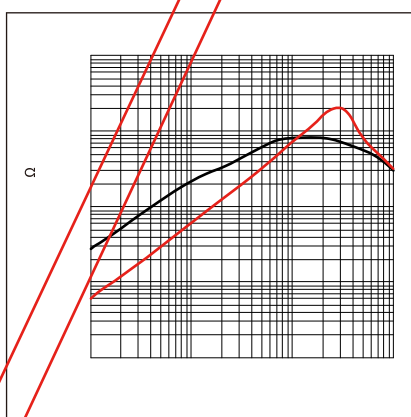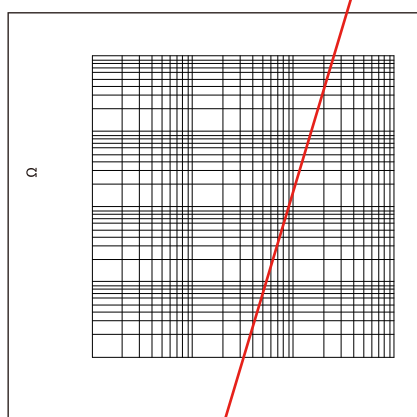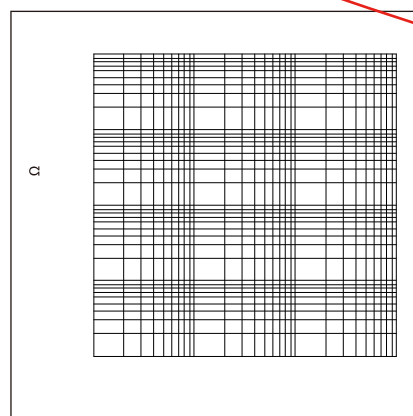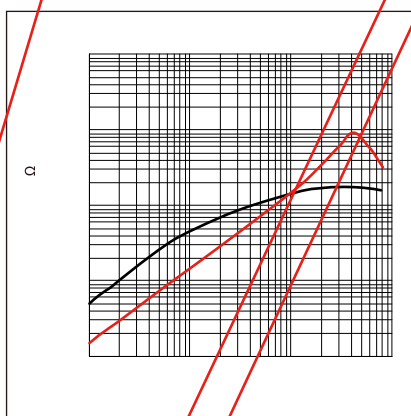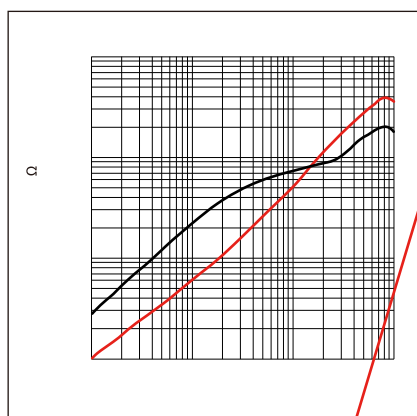

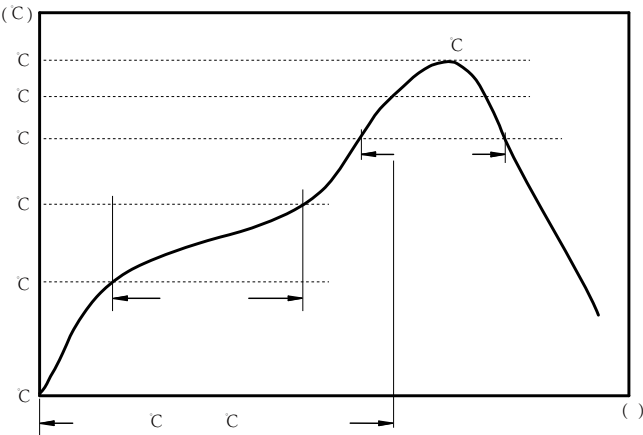


C
 C
 C

:

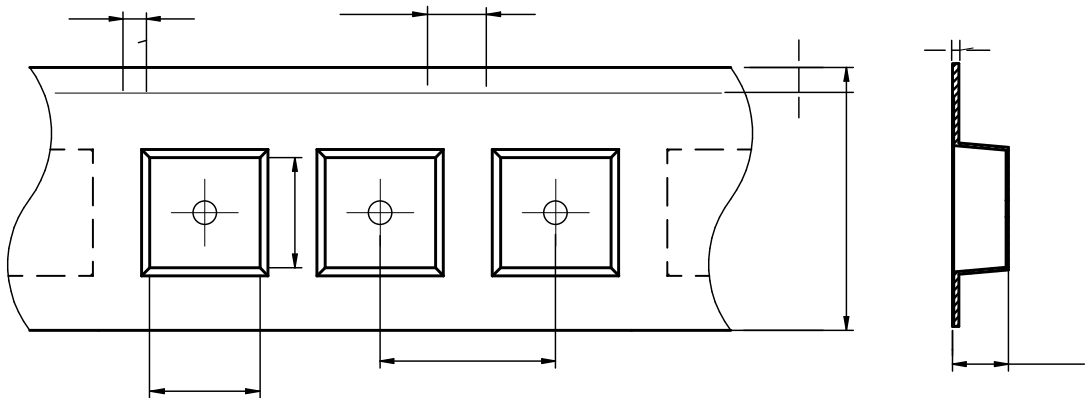

BCMA7060	6.25 ± 0.1	7.7 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	12.0 ± 0.1	16.0 ± 0.3	3.6 ± 0.1	1.75 ± 0.1	0.40 ± 0.05

Marking	Printing (Impedance)
---------	----------------------

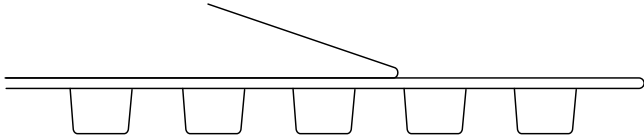

:



:

•

•

•

•

•

•

•

•

•

•

•

•

•