




- Monolithic inorganic material construction.
 - Closed magnetic circuit avoids crosstalk.
 - Suitable for reflow soldering.
 - Available in various sizes.
 - Quantity: 10000pcs
-
- Data lines and low power line
 - Connection between digital and analog circuit

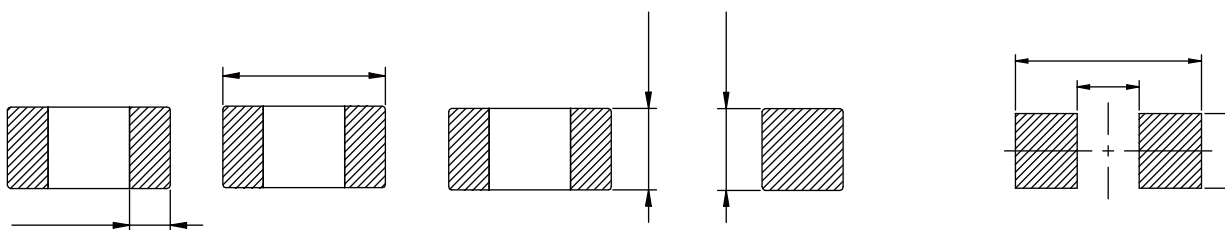

	(Ω)		(max) (Ω)	Current (max) (mA)
		$\pm 25\%$		
		$\pm 25\%$		
		$\pm 25\%$		
		$\pm 25\%$		
		$\pm 25\%$		
		$\pm 25\%$		

Operating Temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Temperature rise current the actual value of DC current when the temperature rise is $\Delta T 40^{\circ}\text{C}$

