

MDCA Series

SMD Power Inductor

Size 3020




FEATUERS

- Carbonyl Powder.
- Compact design.
- High current , low DCR ,
-
- High reliability.
- 100% Lead(Pb)-Free and RoHS compliant.
-
-
-


APPLICATION

- Note PC power system , incl. IMVP-6
-

Dimensions: [mm]

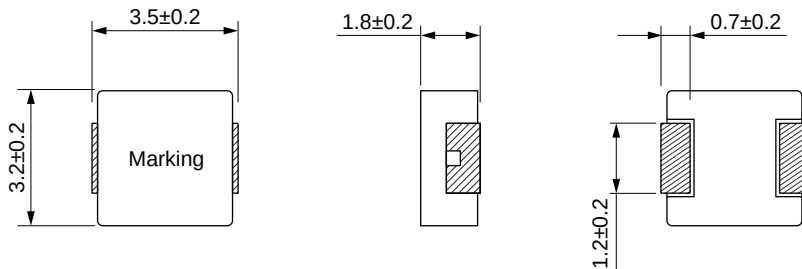

Land Pattern: [mm]



Electrical Properties:

	(μ H)		(A)	Satura on (A)	(m Ω)	(m Ω)
	0.10			14.0	6.6	9.0
	0.22		9.0	11.2	11.0	14.0
		±20%		10.0	17.0	21.0
	0.47	±20%	7.0	9.0	19.7	
		±20%		7.0		29.0
		±20%		6.0	27.0	
	1.00	±20%	4.0			
		±20%		4.0	42.0	
	2.20	±20%				
		±20%				
	4.70	±20%	2.6		172	200
		±20%	2.2	2.6		
		±20%	1.9	2.2	260	
		±20%	1.6	1.9		
	10.0	±20%	1.4	1.6		422

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

