




Molding Power Inductors Size 201610




- High saturation current realized by material properties and structure design.
- Low DC resistance to achieve high conversion efficiency and lower temperature rising.
- Low Profile.
- Magnetically shielded structure to accomplish high resolution in EMC protection.
- Halogen free, Lead Free, RoHS Compliance.
- Operating temperature: -40 to +125 °C
- Quantity: 3000PCS

- Generic in portable DC to DC converter line.
-
- DC/DC converter
- Thin-type power supply module.

Dimensions: [mm]



Land Pattern: [mm]








Electrical Properties:

Part No	Inductance @ 1MHz/1V (μH)	Tolerance	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)	Saturation Current Typ. (A)	Saturation Current Max. (A)	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)


Temperature rising current will cause the coil temperature approximate $\Delta T 40^{\circ}\text{C}$

Saturation current will cause to drop approximately 30 %

Typical Electrical Characteristics:

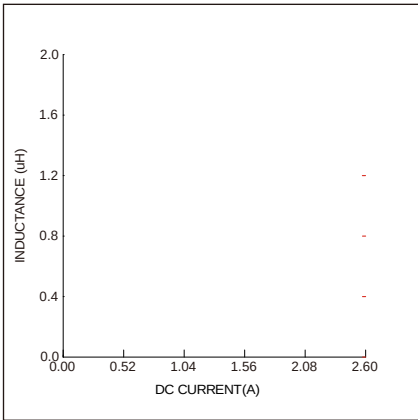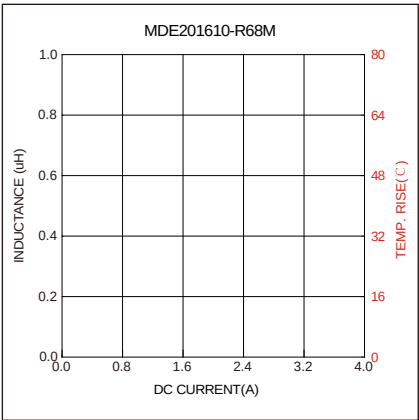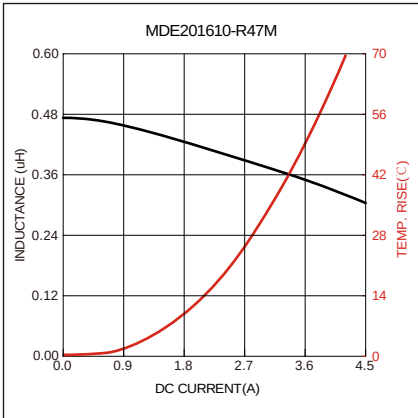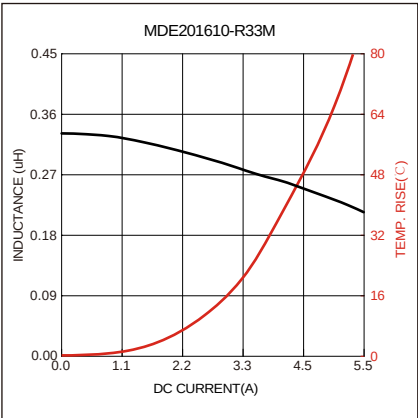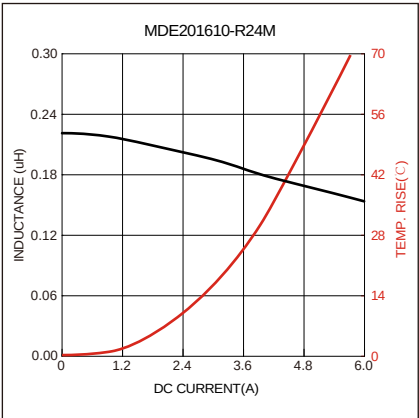

Soldering Reflow:

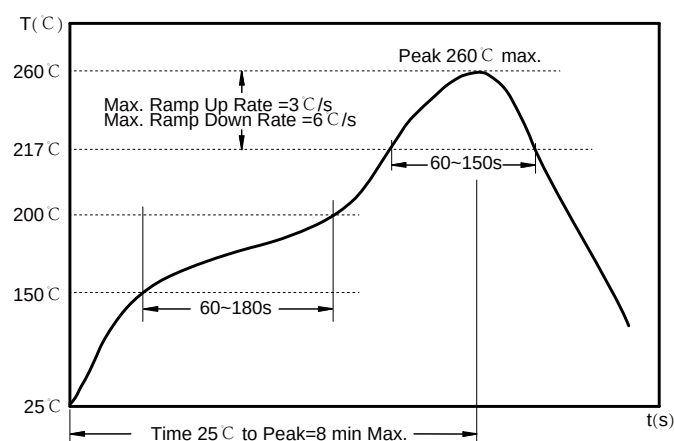

Preheat condition: 150 ~200 °C / 60~180 sec.


Allowed time above 217 °C : 60~150 sec.

Max temperature: 260 °C .

Time within 5 °C of actual Peak Temperature: 20-40 sec.


Packaging Information:

Tape Dimension:

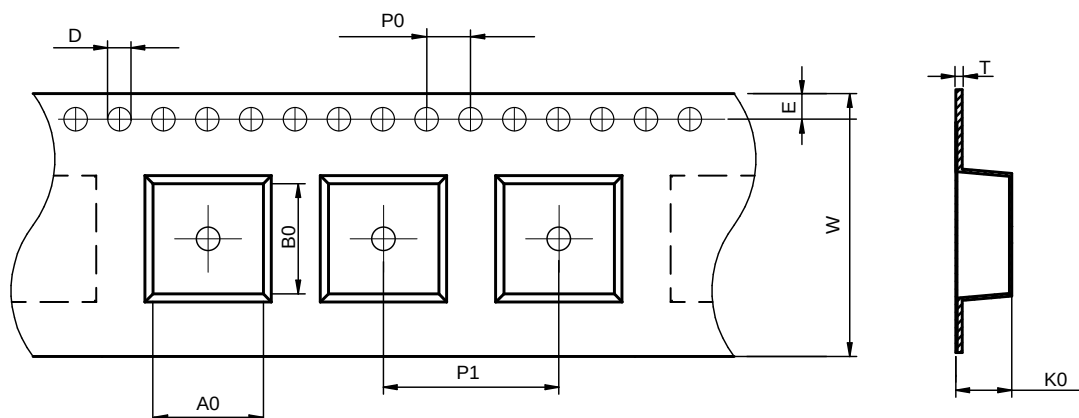


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDE201610	1.82±0.05	2.23±0.05	1.55±0.05	4.0±0.1	4.0±0.1	8.0±0.3	1.15±0.05	1.75±0.1	0.22±0.05

Peel force of top cover tape:

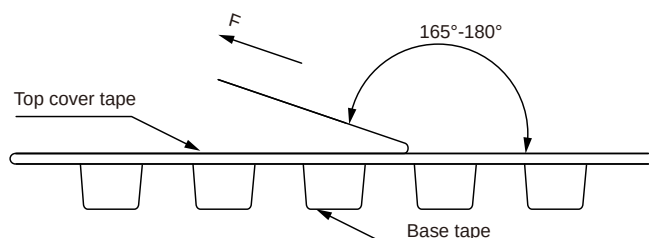

The peel force of top cover tape shall be between 0.1 to 1.3 N

Reel Dimension: [mm]

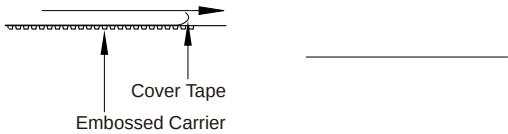

Packaging Quantity: