


## NRSE Series

### SMD Shielded Tiny Power Inductor

### Size 4020




#### CHARACTERISTICS

- Magnetic resin for higher current and semi-magnetically shielded
- Quantity: 3000pcs


#### APPLICATION

- DC/DC converter
- LC filter

#### Dimensions: [mm]

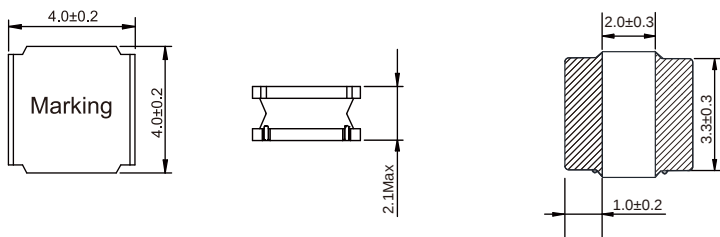

#### Land Pattern: [mm]



#### Electrical Properties:

| NRSE4020-R33N | 0.33 | ±30% | 7.50 | 3.30 | 13.0 |
|---------------|------|------|------|------|------|
| NRSE4020-R47N | 0.47 | ±30% | 7.50 | 3.30 | 18.0 |
| NRSE4020-R68N | 0.68 | ±30% | 7.00 | 3.20 | 24.0 |
| NRSE4020-1R0N | 1.00 | ±30% | 5.10 | 2.15 | 28.0 |
| NRSE4020-1R2N | 1.20 | ±30% | 4.70 | 2.10 | 29.0 |
| NRSE4020-1R5N | 1.50 | ±30% | 4.45 | 1.98 | 35.0 |
| NRSE4020-1R8N | 1.80 | ±30% | 4.00 | 1.90 | 45.0 |
| NRSE4020-2R2M | 2.20 | ±20% | 3.40 | 1.85 | 45.0 |
| NRSE4020-2R7M | 2.70 | ±20% | 3.30 | 1.60 | 53.0 |
| NRSE4020-3R3M | 3.30 | ±20% | 3.20 | 1.40 | 70.0 |
| NRSE4020-4R7M | 4.70 | ±20% | 2.35 | 1.34 | 80.0 |
| NRSE4020-5R6M | 5.60 | ±20% | 2.20 | 1.22 | 95.0 |
| NRSE4020-6R8M | 6.80 | ±20% | 2.00 | 1.04 | 125  |
| NRSE4020-8R2M | 8.20 | ±20% | 1.75 | 1.00 | 150  |
| NRSE4020-100M | 10.0 | ±20% | 1.60 | 0.90 | 165  |
| NRSE4020-120M | 12.0 | ±20% | 1.50 | 0.88 | 175  |
| NRSE4020-150M | 15.0 | ±20% | 1.35 | 0.77 | 230  |

| NRSE4020-220M | 22 | ±20% | 1.05 | 0.62 | 350  |
|---------------|----|------|------|------|------|
| NRSE4020-330M | 33 | ±20% | 0.85 | 0.49 | 500  |
| NRSE4020-470M | 47 | ±20% | 0.74 | 0.44 | 710  |
| NRSE4020-560M | 56 | ±20% | 0.68 | 0.40 | 800  |
| NRSE4020-680M | 68 | ±20% | 0.60 | 0.35 | 1250 |


Operating temperature : -40 °C ~ +125 °C

Temperature rise current: the actual value of DC current when the temperature rise is  $\Delta T 40^{\circ}\text{C}$

Saturation Current that will cause initial inductance to drop approximately 30%

## Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

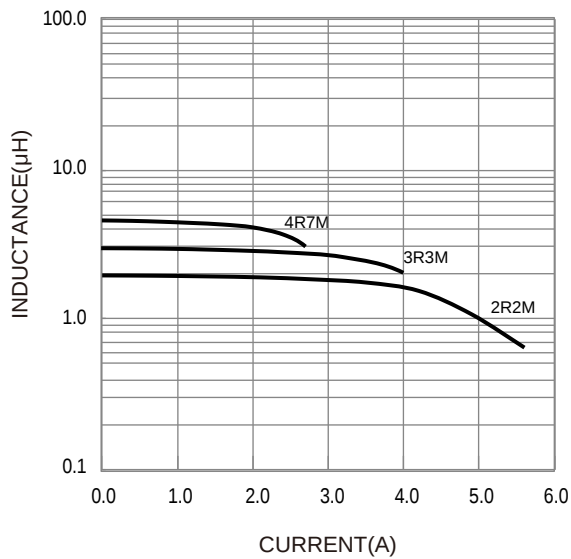

Temperature Rise VS. Current Characteristics:

