



- bɪɫɪyˈYɪtʰSɪŋɪf ʔɻɻK ɪ KɻɻK v ɪtʰ KɻɻK ʔɪSɪjdʒSyʔə
- ʒɪɫʰSɪŋSytʰ ʒɪɫʰSɪ ɪyɾ ʔɻɾʃ ɪyɾdʒʊtʰyʔSɪ ɪtʰɪɪtʰɪtʰ
- vdzɪyʔəy pɪɪɪɪɪ

- [2θ LJ2θŜN 5/κ5 / ŌzyŌŜNúŜN
- CλfúŜN
- DŜyŜN I·f ŌλNŌdzλú I·LJLJfλŌI·ə2y


Land Pattern: [mm]

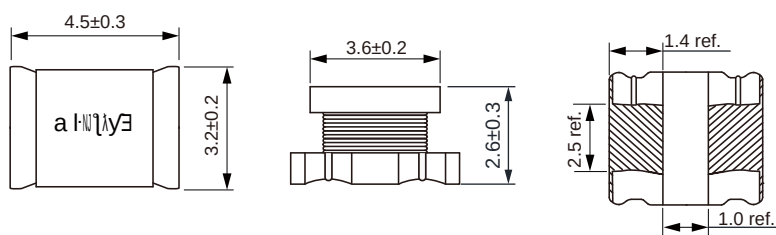

Electrical Properties:

[illegible]


Saturation Current will cause L to drop approximately 10%

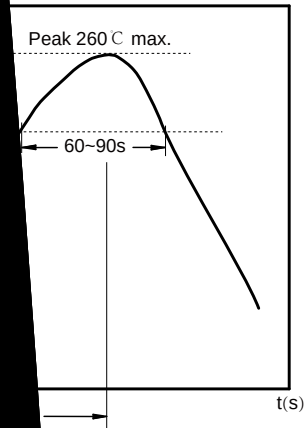


Preheat condition: 150 ~200 °C / 60~120 sec.

Allowed time above 217 °C : 60~90 sec.


Max temperature: 260 °C .

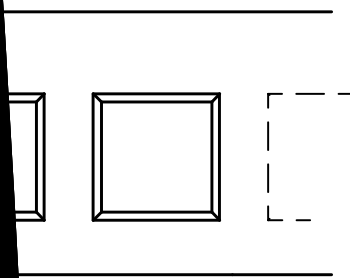

Reel Dimension: [mm]

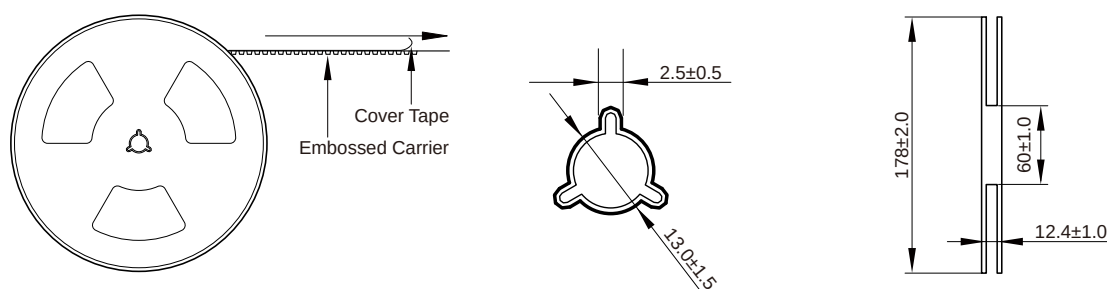

Packaging Quantity:

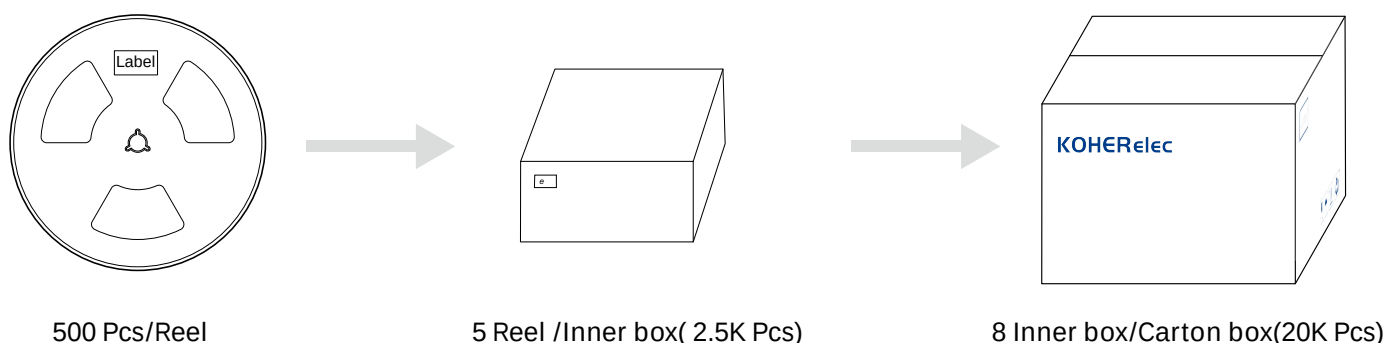

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.