

WWCI Series

SMD Wire Wound Ceramic Inductor

Size 0402




CHARACTERISTICS

- ἡ δὲ ΧΥΘΩΣΣ ΧΥΘΥ ἡ δὲ ὕψω ἡ δὲ ὕψω {wc
- αὐτοῦ σὺ τὸ ΠΣ ΣΨ ὅσοι τὸ ΠΣ ΣΨ ὅσοι
- {ψ τὸ ΠΣ ὅσοι τὸ ΠΣ σὺ τὸ ΠΣ ὅσοι τὸ ΠΣ τὸ ΠΣ τὸ ΠΣ
- νῦν τὸ ΠΣ ὅσοι τὸ ΠΣ


APPLICATION

- IC 4μm^{PRO} 4ΓΩ

Dimensions: [mm]

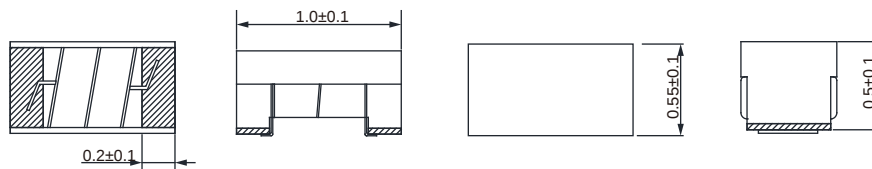

Land Pattern: [mm]



Electrical Properties:


[illegible]

		Condi on					(Ω)	
100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100

hμ\$otΓ° ú\$Ψμ\$otúŃo\$ úú /
 Ε\$Ψμ\$otúŃo\$ oλo\$ ŌŃoλ\$úú ú'1\$ †ŌúŃ†P φ†PŃ\$ úú 5/ ŌŃoλ\$úú X'1\$ú ú'1\$ ú\$Ψμ\$otúŃo\$ oλo\$ úú †E °C

Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

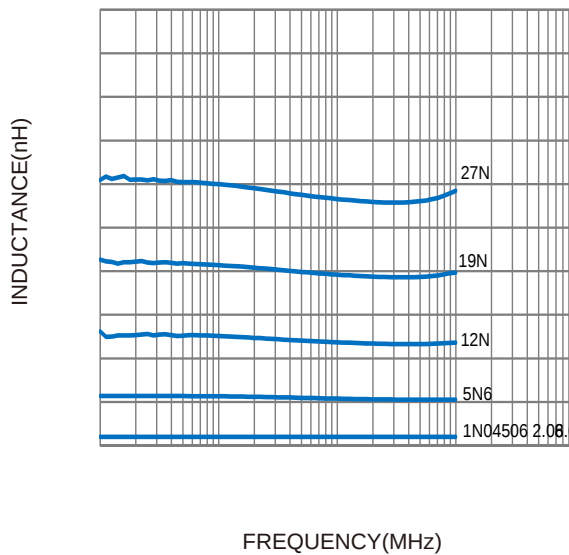

Temperture Rise VS. Frequency Characteristics:

